



**RWS
40W**

40W REEFER TRAILER HEAVY DUTY SOLAR TRICKLE CHARGER

TECHNOLOGY


Industry leading power output | Enhanced performance under all light conditions | Designed and engineered in USA | Outstanding aesthetics | Redundancy by design | Robust module integrity and performance under extreme conditions | Military grade design, materials and approvals

SYSTEM OVERVIEW


Maintain 12V starter battery | Charge through optimized charge controller | Operational even on cloudy days | Easy to install, peel & stick flexible panels | Built in diodes in the solar panel to handle shading

CUSTOMER BENEFITS


Trickle charges the reefer battery to accommodate parasitic loads | Prevents battery drainage as units sit unused | Eliminates "lot rot" at dealerships | Minimizes typical battery warranty issues | Reduces jump start requirements | Maintenance free

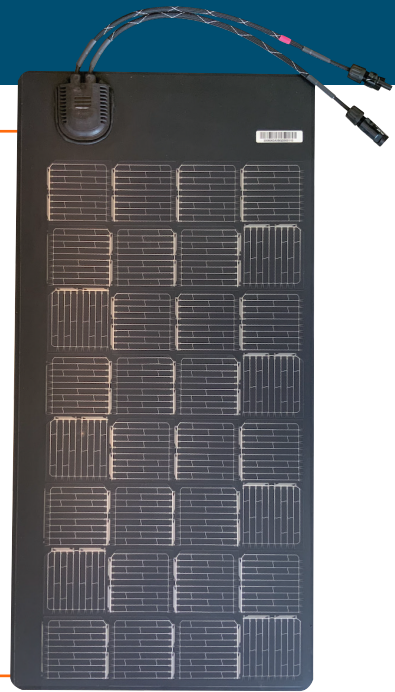

**GRID PATENTED TECHNOLOGY:
FLEXIBLE – RUGGED – LIGHTWEIGHT – MONO cSi**

 **80% Lighter**
than Glass Panels

 **50X More Durable**
vs. Bus-Bar Technology

 **20% More Energy**
In Real World Conditions

 **2.5X Power Density**
vs. Thin Film Technology



40W REEFER TRAILER HEAVY DUTY SOLAR TRICKLE CHARGER




TECHNICAL SPECS

PV Module Specs ¹	Unit	RWS-PV3200Q
Cell Type Mono		PERC
Number of Cells		32
Rated Power (P Max)	W	40
Voltage at Pmax (Vmp)	V	18.2
Current at Pmax (Imp)	A	2.2
Open Circuit Voltage (Voc)	V	21.3
Short Circuit Current (Isc)	A	2.3
Active Area Efficiency	%	18.76
Temperature Co-efficient of Isc	%/°C	0.05
Temperature Co-efficient of Voc	%/°C	-0.33
Temperature Co-efficient of Pmax	%/°C	-0.42
Operating Temperature	°C	-40 to +85
Charge Controller Key Specs		
IP Configuration		IP68
Charging Set Point	V	14.1V
Operating Temperature	°C	-40 to 60
Dimensions	mm	64 x 51 x 38
	In	2.5 x 2.0 x 1.5

1. STC standard test conditions: 1000W/m² intensity, Air Mass 1.5, 25°C cell temperature. Power Tolerance is +/- 5% W at STC. The electrical characteristics are within +/- 10% unless otherwise specified

2. Specifications are subject to change.

RWS-PV3200Q

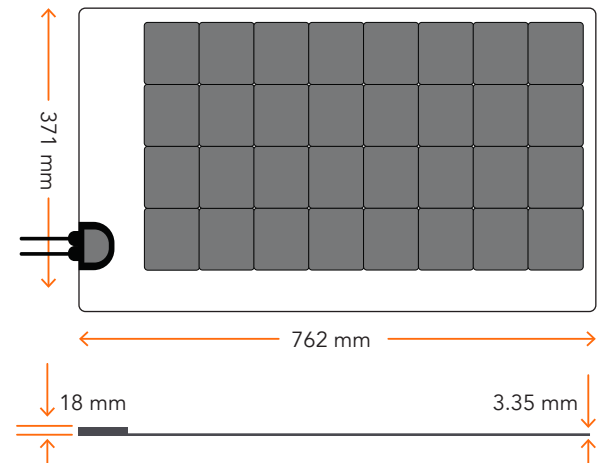

Physical Characteristics				
Units	Length	Width	Thickness*	Weight
mm / kg	762	371	3.35	1.36
in / lb	30	14 ³ / ₈	⁷ / ₁₀	3.0

*Panel at the junction box area 18mm

SCHEMATIC CIRCUIT

